



XGPS170D

OWNER'S MANUAL

**GPS + Dual-Band ADS-B Weather
and Traffic Receiver**

FCC ID: GJW-XGPS170

IC ID: 4038A-XGPS170





XGPS170D

Introduction

Thank you for purchasing the XGPS170D ADS-B Receiver from Dual Electronics.

The XGPS170D is designed to receive signals from the FAA's ADS-B ground network and from other aircraft operating either UAT (978 MHz) or 1090ES (1090 MHz) transceivers. The GPS receiver in the XGPS170D will utilize SBAS correction information (WAAS or EGNOS) and can accurately determine your location anywhere in the world.

The XGPS170D can wirelessly transmit information to many kinds of devices which have Bluetooth connectivity and support the Bluetooth Serial Port Profile (SPP). This includes:

- the iPod touch (generations 2 through 6)
- the iPhone (generations 3G through 6)
- the iPad (1-4), iPad Air (1&2), iPad mini (1-4) and iPad Pro (1)

You can also connect the XGPS170D to many Android smart phones and tablets.

NOTE: Not all manufacturers include SPP in their devices, even if the device has Bluetooth. Please consult the owner's manual for your specific device to determine whether it supports SPP.

A Note on ADS-B

The ADS-B network provides weather data as well as a growing amount of air traffic information. However, ADS-B is an emerging system which still has coverage gaps. The current coverage map is available on the FAA website at <http://www.faa.gov/nextgen>.

Weather. The ADS-B ground system broadcasts regional NEXRAD weather information every 2.5 minutes and continental NEXRAD information every 15 minutes. Both weather broadcasts are received by the XGPS170D.

Traffic. The XGPS170D will also receive ADS-B traffic information from both the ADS-B ground system and from other aircraft operating UAT or 1090ES transponders. Traffic information includes position, heading, speed and altitude for each aircraft.

However, it is important to know that traffic information offered through the ADS-B ground system is only broadcast in response to a signal from an ADS-B Out transponder. Since not all aircraft are equipped with ADS-B transponders at this point, please be aware that the traffic information provided by the ADS-B network is only a partial picture of traffic. Until all aircraft are ADS-B out equipped, *always assume there is air traffic around you that*



XGPS170D


is not being reported by the ADS-B system.

NOTE: The XGPS170D is not an ADS-B Out transmitter.

Additionally, not all electronic flight bag (EFB) apps currently display traffic information even if it is available from an ADS-B source and received by the XGPS170D. Please refer to the documentation for your EFB app to determine whether or not traffic information is displayed.

Lastly, *please be aware that the signal from an ADS-B ground transmitter usually cannot be picked up on the ground.* In some areas, you may need to be above 2000 feet AGL in order to reliably receive broadcasts from an ADS-B ground transmitter. Terrain and proximity to the nearest ground transmitter will affect your reception.

Controls and Indicators

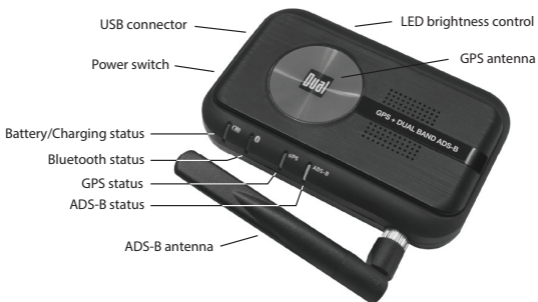

Please refer to the diagram above to locate the controls and indicators on the XGPS170D.

LED brightness control. Use this switch to adjust the brightness of the LEDs on the front of the device.

USB connector. The USB connection is used to recharge the XGPS170D.

Power switch. Slide the power switch from “OFF” to the “ADS-B” position to receive both GPS and ADS-B signals. If you only need GPS information, slide the switch to the middle position, “GPS”.

Battery/Charging status light. This light will flash red when the battery level is low and the device requires recharging. (See **Charging** on page 15.) During charging, the light will glow solid red and it



XGPS170D

will change to green when charging is complete. This light is normally off while the XGPS170D is running.

Bluetooth status light. This blue light will indicate whether the XGPS170D is searching for a device to connect to, or has successfully paired to a device. A slow blue flash (about once per second) indicates the XGPS170D is not connected to any devices but is ready to connect. A solid blue glow indicates that the XGPS170D has successfully paired with at least one device.

GPS status light. The GPS indicator will flash green while the XGPS170D is searching for satellite signals. The light will change to a steady green when your location is successfully determined. NOTE: when paired with an iPad, iPod touch or iPhone the GPS status light will not illuminate until an app is actively requesting information.

ADS-B status light. This light glows solid white when the ADS-B receiver is active. The indicator will quickly flash when it is receiving ADS-B data.

ADS-B antenna connection. The included ADS-B antenna will need to be attached to the XGPS170D before use. Remove the protective rubber cap on the front side of the XGPS170D to expose the ADS-B antenna connector.

An external antenna can also be used with the

XGPS170D



XGPS170D. A dedicated, passive 978 MHz transponder antenna mounted on the bottom of the aircraft is an ideal external antenna option. This antenna should be placed at least 36" away from the existing transponder antenna. Use RG400 cable to connect the antenna to the XGPS170D. A male SMA connector will connect to the antenna port on the XGPS170D.

IMPORTANT: DO NOT connect the XGPS170D to the existing transponder antenna on your aircraft. This will irreparably damage the XGPS170D.

GPS antenna. The GPS antenna in the XGPS170D is located under the red disc. For best GPS reception, position the XGPS170D so that it has an unobstructed view of the sky.



XGPS170D

Setup

Step 1) Remove the rubber cap on the front side of the XGPS170D to expose the antenna connector. Attach the included ADS-B antenna, or connect an external non-amplified antenna using a high quality shielded coaxial cable.

Step 2) Pair the XGPS170D to your iPad or Android tablet (see ***Pairing with your device*** below). The XGPS170D will work with up to two devices simultaneously.

Step 3) Position the XGPS170D on the glare shield or affix it to a window using the included non-slip pad.

Step 4) Download the free ***ADS-B Status Tool*** app from the iTunes App store. This app will give you information about your XGPS170D, such as battery level, charging status and GPS reception status.

PLEASE NOTE: The XGPS170D is intended to be used with popular EFB apps. A current list of compatible EFB apps is available on the web at <http://XGPS170D.dualav.com>.

Step 5) Open a compatible EFB app and begin using the XGPS170D.

Non-slip pad

The included non-slip pad is designed to hold the XGPS170D securely in place on most surfaces.

With the open edge of the pad facing toward you, insert the XGPS170D into the pad so that the red dot will be on the left side.

If the bottom of the pad loses its stickiness from an accumulation of dirt/dust, simply wash the pad with warm water and a mild soap and allow the pad to air dry.

Important note about heat

The XGPS170D has been designed to work at high temperatures, and it is normal for the XGPS170D to become warm when operating. It will also absorb additional heat from the direct sun or when sitting on a hot glare shield so **please use caution when handling the XGPS170D after it has been running in the direct sun because it may be hot.**



XGPS170D

Pairing with your device

The instructions below will guide you through the initial pairing process which connects the XGPS170D to your tablet/smart phone. Once the XGPS170D is paired with your device, it is ready to use.

The XGPS170D can pair to two devices at a time. To pair to the second device, repeat the same instructions you followed for the first.

When powered on subsequently, the XGPS170D will automatically try to reconnect to the last tablet(s) it was paired with. Keep this in mind when trying to use it with multiple devices: if you are having trouble getting another device to recognize the XGPS170D, make sure the last device you used with the XGPS170D is turned completely off or is out of Bluetooth range.

If the Bluetooth connection is interrupted while communicating, either because a device is turned off or because the distance between the two devices is too great, you must turn the XGPS170D off and back on in order for it to automatically reconnect. Alternatively, you can go into your device's settings menu and manually reactivate the link.

NOTE: Activating Airplane Mode on the iPad/iPhone/iPod (which is recommended when flying)

automatically turns off Bluetooth, so it must be manually turned back on. The recommended procedure with the iPad/iPhone/iPod is to activate Airplane Mode, turn Bluetooth back on and then turn on the XGPS170D.

NOTE: The battery in the XGPS170D is already partially charged and the device should turn on the first time you take it out of the box. If the device does not turn on, please charge it from a USB source before continuing - see **Charging** on page 15.

NOTE: *If your device requests a code to connect during the pairing process, use “0000” or “1234”.*

Pairing the XGPS170D with the iPad, iPod touch or iPhone

(NOTE: these instructions were written using iOS version 10.0 and may be different if you are using a different version of the iPhone OS.)

- Turn on the XGPS170D. The blue Bluetooth status light on the XGPS170D will start blinking slowly (about once per second).
- On the iPad/iPod touch/iPhone, go to:

Settings->Bluetooth

and turn on Bluetooth. The device will automatically begin looking for the XGPS170D.



XGPS170D

- After a few moments, the XGPS170D will appear as **XGPS170D-xxxxxx** in the list of devices on the iPod touch/iPad/iPhone screen. (The last 6 digits are part of the XGPS170D Bluetooth ID and will be different for each unit.) The word **Misc** may also appear momentarily before **XGPS170D-xxxxxx** appears.
- Tap **XGPS170D-xxxxxx** in the list of devices to connect to it. The words “Not Connected” will disappear and be replaced by the spinning cursor.
- After a few seconds, “Not Connected” will change to “Connected”. The blue LED on the XGPS170D will blink rapidly for a few seconds and then stay illuminated, confirming the two devices have successfully paired and are communicating.
- The iPad/iPhone/iPod touch may then display a message saying “*Application Not Installed: This accessory requires an application you do not have installed.*” **Despite what the message implies, the XGPS170D is ready to use with your iPad, iPhone or iPod touch and you do not need to download anything to make the XGPS170D work.** We do recommend that you download a free app from the iTunes store, called the **ADS-B Status Tool**, which shows you detailed information about the XGPS170D

(device status & battery charge level and the signal reception). Tap “Yes” to be redirected to the iTunes store to download this app, or “No” to download it later. The **ADS-B Status Tool** app is a completely optional download.

Pairing the XGPS170D with an Android device

(NOTE: these instructions were written using Android OS version 4.4 and may be different if you are using a different version of the Android OS.)

- Turn on the XGPS170D. The blue Bluetooth status light on the XGPS170D will start blinking slowly (about once per second).
- On the Android device go to:

Settings->General->Developer Options

and enable the option for **Allow mock locations**. This will let the Android device use GPS information from an external device like the XGPS170D.

- On the Android device go to:

Settings->Connections-> Network Connections

and turn on Bluetooth.

- Tap “**Scan**” and the Android device will begin looking for available Bluetooth devices.
- After a few seconds, the word **XGPS170D-xxxxxx** will appear in the list of devices. (Note:



XGPS170D

the last 6 digits are part of the XGPS170D Bluetooth ID and will vary from device to device.) At this point, the Android device may say **Paired but not connected** and the blue Bluetooth indicator on the XGPS170D will continue to blink slowly.

- If you are interested in using the XGPS170D with GPS-enabled applications other than EFB apps, you will need to install a helper app on your Android device. This app runs in the background and will let apps receive GPS information from the XGPS170D. Several free helper apps are available on the Android Market. Please see the FAQ section on the Dual website (<http://XGPS170D.dualav.com/faq.html>) for specific recommendations and installation instructions. **A helper app is not required for use with most EFB apps. It is only required for car & marine navigation apps or other apps which only use GPS information.**

If you need additional help connecting the XGPS170D to your device, please contact customer service (send e-mail to cs@dualav.com or call 855-936-0129). However, due to the enormous variety of available smart phones and tablets, you may need to contact the manufacturer of your specific device for additional instructions.

Charging

To charge, connect the XGPS170D to a charger using a standard USB cable (included).

Two chargers are included with the XGPS170D: a 120-240VAC wall charger and a 12-30VDC cigarette lighter adapter charger. Other chargers can be used, but they must be rated to supply at least 2.1A of charging current. To avoid charging problems, we recommend using only chargers from high quality manufacturers.

NOTE: Laptop USB ports will not supply enough charging current to the XGPS170D, and should not be used for charging.



XGPS170D

Tips for best performance

- For best GPS reception, put the XGPS170D in a location with a clear view of the sky.

- The ADS-B broadcast is a line-of-sight UHF signal originating from both terrestrial and airborne transmitters: weather is sent from ground stations, and traffic is transmitted from both ground stations and other aircraft. For the best ADS-B reception, place the XGPS170D where the ADS-B antenna has a clear view out of the cockpit window, i.e. not down on a seat where the fuselage blocks signals from reaching the antenna.

- The range of the Bluetooth connection will drop as the battery level drops. If you find that the wireless connection is failing, try recharging the XGPS170D.

- Windshields with integrated heating elements can severely attenuate GPS signals. If your aircraft has these, we recommend placing the XGPS170D in an unheated side window for best reception.

- You can renew the stickiness on the bottom of the non-slip pad by washing the pad with warm water and mild soap. Let the pad air dry or dry it with a lint-free cloth.

Troubleshooting

- In most locations, it is not possible to receive ADS-B weather or traffic signals from a ground transmitter unless you are airborne (sometimes as high as 2000 feet AGL.). ADS-B broadcasts are also not available in all areas of the US yet. Please see <http://www.faa.gov/nextgen/programs/adsb> for the most current information on coverage.

- If the XGPS170D does not automatically reconnect to your tablet/smart phone, turn off both devices and then turn on the XGPS170D after turning on your tablet/smart phone.

- Activating Airplane Mode on an iOS device will turn off Bluetooth automatically. If you are using Airplane Mode, you will need to manually re-enable Bluetooth on the iOS device, and then turn on the XGPS170D.

- If you cannot pair the XGPS170D with a device:

Step 1. Check to see if the XGPS170D is still connected to a previous device: if the blue light on the XGPS170D is not blinking, it is connected to at least one other device. Turn off Bluetooth on the previously paired device, or move the device out of Bluetooth range.

Step 2. Completely power down and reboot both the device and the XGPS170D.



XGPS170D

- The battery in the XGPS170D is not user-serviceable. For battery issues, please contact Customer Support for additional help: send e-mail to cs@dualav.com or call 855-936-0129.

For other questions or additional help, please contact Customer Support via e-mail at cs@dua-lav.com or call 855-936-0129.

Specifications

Dimensions (WxHxD in mm)

- XGPS170D: 110 x 70 x 25
- Non-slip pad: 113 x 184 x 29

XGPS170D Voltage

- Input voltage: 5 VDC

Cigarette Lighter Power Adapter Voltage

- Input voltage: 12-30 VDC
- Output: 5 VDC, 2.1A

GPS

- L1 frequency, SBAS (WAAS, MSAS, EGNOS, GAGAN) supported.
- Cold start: < 29 sec. typ. (open sky)
- Warm start: < 25 sec. typ. (open sky)

Bluetooth

- Version: 2.1+EDR
- Range: ~10m (~33 ft.) (open space)

ADS-B

- 978 MHz and 1090 MHz receive-only

Internal Battery

- Operating time: ~4 hours
- Charging time: ~3 hours

Environment Requirements

- Operating temp: 14°F - 140°F (-10°C - 60°C)
- Storage temp: -4°F - 176°F (-20°C - 80°C)
- Relative humidity: 5% - 95% non condensing



XGPS170D

ICC Compliance

This Class [B] digital apparatus complies with Canadian ICES-003.

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular in-

stallation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state. Dual Electronics Corp. warrants this product to the original purchaser to be free from defects in material and workmanship for a period of one year from the date of the original purchase.

Dual Electronics Corp. agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent re-



XGPS170D

placement products are warranted for the balance of the original warranty period.

Who is covered? This warranty is extended to the original retail purchaser for products purchased from an authorized Dual dealer and used in the U.S.A.

What is covered? This warranty covers all defects in material and workmanship in this product. The following are not covered: software, installation/removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product. Specific license conditions and copyright notices for the software can be found via <http://www.dualav.com>.

What to do?

1. Before you call for service, check the appropriate section in this manual. A simple adjustment may save you a service call.

2. If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.

3. Please describe your problem in writing and

include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.

4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:

- Call us toll-free at 1-855-936-0129
- E-mail us at cs@dualav.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental or consequential damages.



Dual Electronics Corp.
Toll Free: 1-855-936-0129

www.dualav.com
©2017 Dual Electronics Corp.
All rights reserved.

iPod, iPad and iPhone are trademarks of Apple Inc., registered in the US and other countries. "Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Namsung is under license. Other trademarks and trade names are those of their respective owners.